

Handheld General Range Vacuum Gauge



Model 1520 in optional frame case



Kit 1520K-10

- Accurate vacuum measurement from 1 to 760torr
- Portable unit connects quickly to any vacuum source

Take fast, easy vacuum measurements at multiple locations with this portable vacuum gauge. The internal piezoelectric sensor reads results to a large LCD. Stands upright using optional protective frame case. Use standard 3/8" I.D. vacuum hoses to connect to vacuum source. Operates on standard 9V battery or using AC adapter. Meter dimensions: 3.625"Wx1.25"Dx5.75"H. Available as standalone unit or in convenient carrying case kit with frame case/stand, battery, AC adapter, and vacuum hoses length.

CAT. No.		Range	Description
Meter	Meter with Kit		
1520B-01	1520K-10 ¹	1 to 760torr	Handheld Vacuum Gauge, 9V, torr
1520C-02	1520K-11 ²	1 to 1013mBar	Handheld Vacuum Gauge, 9V, mBar

Notes: 1. 120 VAC adapter
2. 220 VAC Euro adapter

Handheld Mid-High Vacuum Gauge



- Accurate vacuum measurement from 0.1 to 1999 millitorr
- Portable unit connects quickly to any vacuum source

Take accurate vacuum readings at multiple sites using this portable vacuum gauge. The external thermocouple sensor reads results to a large LCD. Stands upright using optional protective frame case. Sensor coil cord extends from 1 to 4 feet to connect vacuum source using 1/8" NPT fitting. Operates on standard 9V battery or using AC adapter. Meter dimensions: 3.625"Wx1.25"Dx5.75"H. Available as standalone unit with thermocouple tube sensor or in convenient carrying case kit with frame case/stand, battery, AC adapter, and thermocouple tube sensor¹.

CAT. No.		Range	Display	Description
Meter	Meter w/ Kit			
1525B-01	1525K-10 ²	0.001 to 1.0torr	1 to 1000 x 10 ⁻³ torr	Handheld Vacuum Gauge
1525C-02	1525K-11 ³	0.001 to 1.3mbar	1 to 1300 x 10 ⁻³ mbar	Handheld Vacuum Gauge

Notes: 1. For replacement sensor, order 1516A
2. 120 VAC adapter.
3. 220 VAC Euro adapter

Thermocouple Vacuum Gauge




- Vacuum measurement to low millitorr (micron) range
- Rugged, reliable thermocouple gauge sensor tube

Gauges provide an accurate, reliable measurement of vacuum. Self-contained gauges with solid-state electronics for rapid response time, long life and low maintenance. Comes with a 0 to 10 VDC recorder output. The gauge sensor tubes are designed to assure maximum sensitivity over the entire vacuum range. Gauge sensor tube connected to system via 1/8" NPT thread. Each gauge comes with one sensor tube and one cable. Meter dimensions: 7"Lx5"Wx5.6"H (17.8x12.7x14.1cm); Weight 2 lbs. (0.9kg).

Gauge CAT. No.	Range (millitorr)	Voltage	Protective Trap CAT. No.	Replacement Sensor Tube CAT. No.
1515	0 to 5000	115V, 60Hz, 1Ph	1515B	1515A

Vacuum Control Box

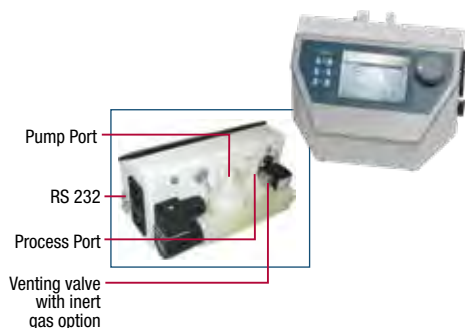

Programmable vacuum controller VCB 521 cv with a built-in highly resistant ceramic diaphragm sensor for absolute pressure determination. Uses a chemically resistant solenoid valve to control the process vacuum while the pump runs continually. The user defined vacuum and hysteresis levels are used to open and close the control valve thus maintaining vacuum at the process between the high and low control points with easy 8mm hose barb pump and process port connections. Meter dimensions: 7.6"Lx7"Wx4.1"H (19.5x17.8x10.5cm).

Model	Measuring Range	Voltage	CAT. No.
VCB 521 cv	1100 - 1mbar	90-260V, 50/60 Hz	600053-US

Peristaltic - Fluid Transfer Pumps

Models 3100/3200

Replacement Cartridges for Models 3100/3200

Material	Silicone	PVC
Applications	Biofluids / Food	General Lab, Viscous Fluids
Tubing I.D. (Flow Rate Range)	Tubing Cartridges (5 each) CAT. No.	Tubing Cartridges (5 each) CAT. No.
1.6mm (3-30 ml/min) - 5 pack	3432K-01	3434K-01
3.2mm (10-130 ml/min) - 5 pack	3432K-02	3434K-02
4.8mm (30-300 ml/min) - 5 pack	3432K-04	3434K-04





3100



3200

Service Kit CAT. No. 3200K-02 for Models 3100/3200

ID	Qty.	Description
1	1	Pump Head
2	1	Roller Carrier
3	1	Lock
4	1	Rolling Band

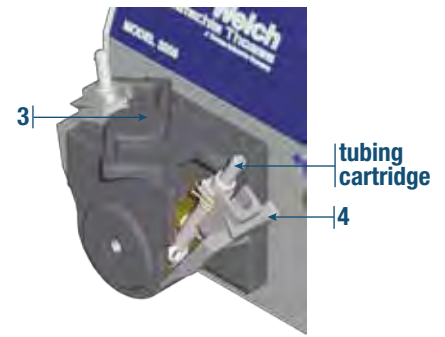

Index

Catalog No.	Page No.
1201E	46
1201T	46
1371A-01	19,20,24,25,26
1371A-01	26
1373K-05	36
1373K-06	36
1374	18
1374A	18
1374K-07	18
1374K-08	18
1376	19
1376B-46	36
1376K-05	19
1376K-06	19
1376K-09	26
1376K-10	26
1376K-46	36
1376K-47	36
1376N	26
1380	20
1380K-03	20
1380K-04	20
1393F	7,27
1393G	7,26,28
1393G	28
1393H	7
1393J	22,23
1393K	19,20,24,25
1393L	18,21
1393N	8
1393P	8
1393X	7,29
1397	21
1397A	21

Catalog No.	Page No.
1397B-46	36
1397K-07	21
1397K-08	21
1397K-46	36
1397K-47	36
1399	22
1399A	22
1399K-03	22
1399K-04	22
1400	23
1400A	23,27
1400K-03	23
1400K-04	23
1400K-09	27
1400K-10	27
1400N	27
1401D	19,20,24,25,26,28
1401D-01	19,20,24,25,26
1401E	22,23,27
1401E-01	22,23,27
1401F	18,21
1402	24
1402B-46	36
1402K-02	25
1402K-05	24,25
1402K-06	24
1402K-09	28
1402K-10	28
1402K-46	36
1402K-47	36
1402N	28
1405	25
1405A	19,20,24,25,26,28
1407K-11	3

Catalog No.	Page No.
1407K-15	3
1407K-20	3
1412C	13,51,52
1412D	13
1412E	13
1415B	13,42,51,52,53,54
1415C	13,51,52,53,54
1415D	13
1416B	12
1416C	12
1416C-01	12
1416D	12
1416E-01	10,12
1416E-02	10,12
1416H	12
1416H-01	12
1417	12,29
1417G	12
1417H-01	12
1417L	12,29
1417P-10	12
1417P-20	12
1417P-7	12
1417R	12
1417Y-05	12
1420H-01	11
1420H-02	11
1420H-14	10
1420H-17	11
1420H-18	11
1420H-19	11
1420H-20	10
1420H-21	10
1421	5

Catalog No.	Page No.
1421D	5
1423B	13,42
1426	45
1426K-01	45
1430A	11
1430B	11
1430C	11
1475K-01	55
1475K-02	55
1475K-03	55
1475K-04	55
1475K-05	55
1475K-06	55
1475K-07	55
1475K-08	55
1475K-09	55
1475K-10	55
1475K-20	55
1475K-21	11,55
1475K-22	11
1475K-23	11
1515	4
1515A	4
1515B	4
1520B-01	4
1520B-02	4
1520K-10	4
1520K-11	4
1525B-01	4
1525C-02	4
1525K-10	4
1525K-11	4
1801Z	46
2014	38