
 **Metal tubing flexible, triple insulated, -100 to +350 °C**


| JULABO Order No. | Description | Suitable for |
|------------------|---|--------------|
| 8 930 261 | 1.0 m Metal tubing, 2 fittings M24x1.5 female | PRESTO® |
| 8 930 262 | 1.5 m Metal tubing, 2 fittings M24x1.5 female | PRESTO® |
| 8 930 263 | 2.0 m Metal tubing, 2 fittings M24x1.5 female | PRESTO® |
| 8 930 264 | 3.0 m Metal tubing, 2 fittings M24x1.5 female | PRESTO® |
| 8 930 271 | 1.0 m Metal tubing, 2 fittings M30x1.5 female | PRESTO® |
| 8 930 272 | 1.5 m Metal tubing, 2 fittings M30x1.5 female | PRESTO® |
| 8 930 273 | 2.0 m Metal tubing, 2 fittings M30x1.5 female | PRESTO® |
| 8 930 274 | 3.0 m Metal tubing, 2 fittings M30x1.5 female | PRESTO® |
| 8 930 275 | 5.0 m Metal tubing, 2 fittings M30x1.5 female | PRESTO® |
| 8 930 282 | 1.5 m Metal tubing, 2 fittings M38x1.5 female | PRESTO® |
| 8 930 283 | 2.0 m Metal tubing, 2 fittings M38x1.5 female | PRESTO® |
| 8 930 284 | 3.0 m Metal tubing, 2 fittings M38x1.5 female | PRESTO® |
| 8 930 285 | 5.0 m Metal tubing, 2 fittings M38x1.5 female | PRESTO® |



 **Interfaces / Software & Hardware**

| JULABO Order No. | Description | Suitable for |
|------------------|--|--------------|
| 8 900 105 | Electronic module with analog connectors (Input, Output, Standby-In) | PRESTO® |
| 8 900 020 | Profibus DP Interface | PRESTO® |
| 8 900 022 | Modbus Interface | PRESTO® |
| 8 900 024 | RS485 Interface | PRESTO® |
| 8 980 771 | Pressure sensor, 2 fittings M24x1.5 male (-95 ... +250 °C) | PRESTO® |
| 8 970 815 | Sight glass, -100...+280 °C, PN16/Class 230, 2 fittings M30x1.5 male | PRESTO® |
| 8 900 500 | WirelessTEMP Remote Control | PRESTO® |
| 8 900 505 | WirelessTEMP Remote Control, ATEX Version | PRESTO® |
| 8 900 540 | WirelessTEMP USB Stick | PRESTO® |
| 8 900 530 | WirelessTEMP Router for extending wireless range | PRESTO® |
| 8 901 102 | EasyTEMP Software (free of charge at www.julabo.com) | PRESTO® |
| 8 901 105 | EasyTEMP Professional Software, incl. USB-Dongle | PRESTO® |

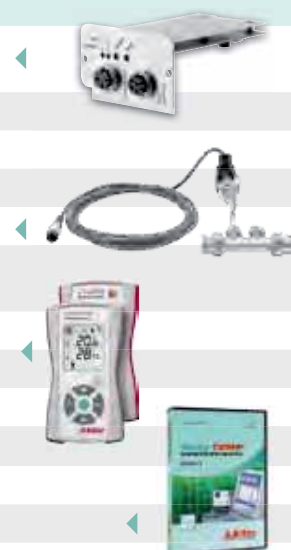

 **VFCpro Measure & control flow, determine calorimetry**

| JULABO Order No. | Description | Suitable for |
|------------------|-------------|------------------------------|
| 8 980 782 | VFC | A40, A80, W40, W80, W91, W92 |
| 8 980 762 | VFCpro-24 | A40, A80, W40, W80 |
| 8 980 764 | VFCpro-38 | W91, W92 |

