
 **Metal tubing flexible, triple insulated, -100 to +350 °C**


JULABO Order No.	Description	Suitable for
8 930 261	1.0 m Metal tubing, 2 fittings M24x1.5 female	PRESTO®
8 930 262	1.5 m Metal tubing, 2 fittings M24x1.5 female	PRESTO®
8 930 263	2.0 m Metal tubing, 2 fittings M24x1.5 female	PRESTO®
8 930 264	3.0 m Metal tubing, 2 fittings M24x1.5 female	PRESTO®
8 930 271	1.0 m Metal tubing, 2 fittings M30x1.5 female	PRESTO®
8 930 272	1.5 m Metal tubing, 2 fittings M30x1.5 female	PRESTO®
8 930 273	2.0 m Metal tubing, 2 fittings M30x1.5 female	PRESTO®
8 930 274	3.0 m Metal tubing, 2 fittings M30x1.5 female	PRESTO®
8 930 275	5.0 m Metal tubing, 2 fittings M30x1.5 female	PRESTO®
8 930 282	1.5 m Metal tubing, 2 fittings M38x1.5 female	PRESTO®
8 930 283	2.0 m Metal tubing, 2 fittings M38x1.5 female	PRESTO®
8 930 284	3.0 m Metal tubing, 2 fittings M38x1.5 female	PRESTO®
8 930 285	5.0 m Metal tubing, 2 fittings M38x1.5 female	PRESTO®



 **Interfaces / Software & Hardware**

JULABO Order No.	Description	Suitable for
8 900 105	Electronic module with analog connectors (Input, Output, Standby-In)	PRESTO®
8 900 020	Profibus DP Interface	PRESTO®
8 900 022	Modbus Interface	PRESTO®
8 900 024	RS485 Interface	PRESTO®
8 980 771	Pressure sensor, 2 fittings M24x1.5 male (-95 ... +250 °C)	PRESTO®
8 970 815	Sight glass, -100 ... +280 °C, PN16/Class 230, 2 fittings M30x1.5 male	PRESTO®
8 900 500	WirelessTEMP Remote Control	PRESTO®
8 900 505	WirelessTEMP Remote Control, ATEX Version	PRESTO®
8 900 540	WirelessTEMP USB Stick	PRESTO®
8 900 530	WirelessTEMP Router for extending wireless range	PRESTO®
8 901 102	EasyTEMP Software (free of charge at www.julabo.com)	PRESTO®
8 901 105	EasyTEMP Professional Software, incl. USB-Dongle	PRESTO®

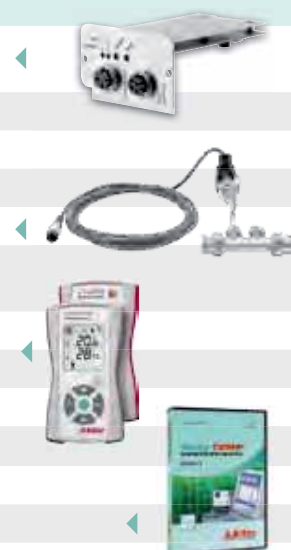

 **VFCpro Measure & control flow, determine calorimetry**

JULABO Order No.	Description	Suitable for
8 980 782	VFC	A40, A80, W40, W80, W91, W92
8 980 762	VFCpro-24	A40, A80, W40, W80
8 980 764	VFCpro-38	W91, W92

