

Cowie® K-type PTFE Encapsulated Stainless-steel Thermocouple Probes, Can be Bent, -180°C +280°C NEW
 with Miniplug & PFA Insulated 1&2m Cable, Probe Body L100~900mm, PTFE 내약품/내부식/청결형 온도 프로브



- **Made in UK.**
- **Ideal for Reactor : Especially Long Body Probes**
- * Outstanding Chemical Resistance, No-Contamination of Working Media, and Pressure Resistant
- * Fully Pure PTFE Encapsulated Stainless-steel Core Probe for Rigidity, But can be Bent
- * with Push-On Ferrule * Response : 50% in 6~14 seconds, -180°C+280°C

(1) With L100~L700mm Probe-body and 1m Cable

Cat. No	Probe Body	Ferrule	Total Length
CW.600.101.1	PTFE Capsulated K-probe, Body- $\phi 6 \times l 100$	L35mm	Total -L135mm
CW.600.201.1	$\phi 7 \times l 200$	-L40mm	-L240mm
CW.600.301.1	$\phi 8 \times l 300$	-L40mm	-L340mm
CW.600.401.1	$\phi 8 \times l 400$	-L50mm	-L450mm
CW.600.501.1	$\phi 9 \times l 500$	-L60mm	-L560mm
CW.600.601.1	$\phi 9 \times l 600$	-L60mm	-L660mm
CW.600.701.1	$\phi 9 \times l 700$	-L45mm	-L745mm

Ea.	Price, ₩

(2) With L500~L900mm Probe-body and 2m Cable


Cat. No	Probe Body	Ferrule	Total Length
CW.600.501.1.2	PTFE Capsulated K-probe, Body- $\phi 9 \times l 500$	L60mm	Total-L560mm
CW.600.601.1.2	$\phi 9 \times l 600$	-L60mm	-L660mm
CW.600.701.1.2	$\phi 9 \times l 700$	-L45mm	-L745mm
CW.600.901.1.2	$\phi 9 \times l 900$	-L45mm	-L945mm

Ea.	Price, ₩

K-type Thermocouple Probes, for Wide-range Temp. -160°C ~ +1200°C NEW
 with Common use Plug "Miniature 2 x Flat" and Cable, "K-형" 온도계 & 각종 열기구 온도 프로브

- **K-Type Sensor Probes for Different Applications (Penetration Probe, Surface Probe, Pipe Clamp)** ■ Cable : od. $\phi 3 \times L.1020$ mm
- **Miniature 2 x Flat (L14 x Thick 1mm) Plug Type** ■ Handle : Thermo Plastic od. $\phi 17 \times L.170$ mm

(1) For Liquid & Air, Stainless-steel Probe, Resin Handle with Cable/Plug, -160°C ~ +1200°C



- AS1.5522.04 Liquid/ Air Probe "K", -160 ~ +700°C, $\phi 1.0 \times L306$ mm, 1m Cable/Plug
- DH.WHP503040 , -60 ~ +600°C, $\phi 4.8 \times L250$ mm, 1.8m Cable/Plug
- DH.WHP503050 , -60 ~ +500°C, $\phi 4.8 \times L380$ mm, 1.8m Cable/Plug

Ea.	Price, ₩


(2) For Semi - solid Penetration-type, Stainless-steel Probe, Resin Handle with Cable/Plug, -100°C ~ +1000°C



- A1.TK175S Penetration Probe "K", -100 ~ +800°C, $\phi 3.2 \times L150$ mm, 1m Cable/Plug
- A1.TK225S , -100 ~ +1000°C, $\phi 6.4 \times L200$ mm, 1m Cable/Plug

Ea.	Price, ₩


(3) For Surface / Contact, Stainless-steel Probe, Resin Handle with Cable/Plug, -100°C ~ +400°C

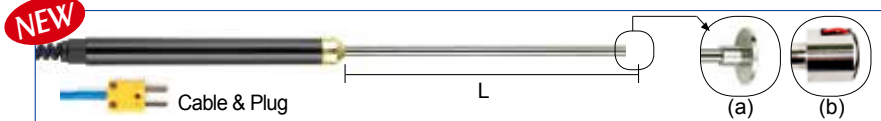

- A1.TK004T (a) Surface Probe "K", Head : $\phi 15 \times t1.5$, Stem : $\phi 3.5 \times L180$ mm, -100 ~ +400°C, 1m Cable/Plug
- A1.TK033T (b) : $\phi 16 \times t14$, Stem : $\phi 6.5 \times L215$ mm, -100 ~ +400°C, 1m Cable/Plug

Ea.	Price, ₩

(4) Pipe Clamping Probe, with Cable Plug, -100°C ~ +120°C

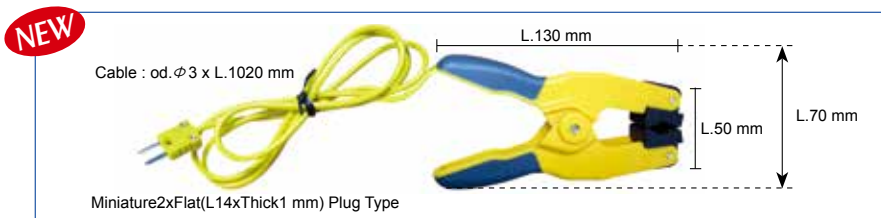

- A1.TK0063 Pipe Clamp Probe, Pipe / Tubing, $\phi 6 \sim 22$ mm Grip -100°C ~ +120°C

Ea.	Price, ₩