

Swing-out Rotor, GRS-G-100-6

6 loadings, 90° | for 1248, 1248R, 1236R, 1580, 1580R



O-ring sealed Cap

Bucket, GLB-b100-100

4,000 rpm / 3,105 xg
one tube each

Bucket, GLB-10-8-100

4,000 rpm / 3,105 xg
8 tubes each

Bucket, GLB-bd15-100

4,000 rpm / 3,032 xg
2 tubes each




Bucket, GLB-b50-100


4,000 rpm / 3,032 xg
one tube each

Bucket, GLB-bdc15-100


4,000 rpm / 3,105 xg
2 tubes each

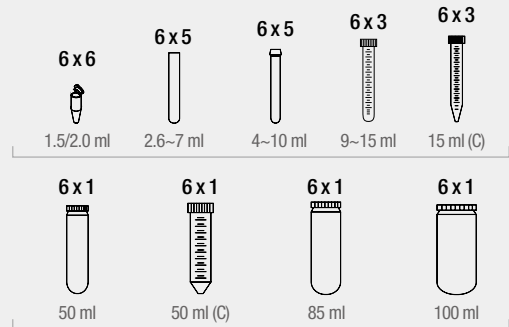

Tube Racks and Adaptors for GLB-b100-100

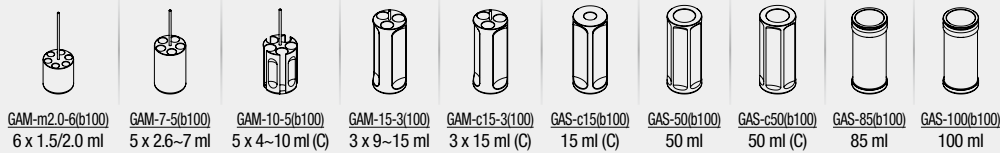

Tube Racks and Adaptors for GLB-b50-100




Fixed Angle Rotor, GRF-G-250-6


6 x 250/15 ml, 25° | for 1580R



Rotor, GRF-G-250-6

8,000 rpm / 9,395 xg (15 ml), 9,588 xg (250 ml)



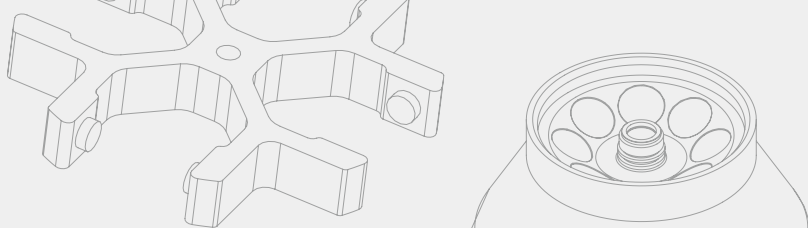

Ordering Information - Rotors and Buckets

Cat. No. & Description		Max. Capacity	Max. Speed		Bore Size (ϕ x L, mm) or (width, mm) or (hole diameter, mm)	Max. Height for tube fit (mm)	Radius (mm)
Rotors	Buckets & Microplate Holders		RPM	RCF (xg)			
Swing-out Rotor							
GRS-G-r750-4 Four-wing rectangular 750 ml swing-out rotor <i>Only for 1580 & 1580R</i>	GLB-r750-r750 a 750 ml rectangular bucket	4 x 500 ml conical	3,600	2,898	99 x 99 x 98	135	200.0
	GLB-500-r750 500 ml round bucket	4 x 500 ml	3,600	3,159	69.2 x 135	165	218.0
	GLP-mw-r750 Microplate holder	4 x 96 plate (MTP/DWP)	3,600	2,485	88 x 128.5 x 80	-	171.5
GRS-G-750-4 Four-wing round 750 ml swing-out rotor <i>Only for 1580 & 1580R</i>	GLB-750-750 a 750 ml round bucket	4 x 750 ml	4,000	3,667	99 x 101.5	142	205.0
	GLB-b750-750 a 750 ml O-ring sealed bucket	4 x 750 ml	4,000	3,667	99 x 101.5	130 (w/cap) 142 (w/o cap)	
	GLB-500-750 500 ml round bucket	4 x 500 ml	4,000	3,900	69.2 x 135	165	218.0
	GLP-mw-750 Microplate holder	4 x 96 plate (MTP/DWP)	4,000	3,068	88 x 128.5 x 80	-	171.5
GRS-G-r250-4 Four-wing rectangular 250 ml swing-out rotor	GLB-r250-r250 a 250 ml rectangular bucket	4 x 250 ml	4,000	3,134	86 x 70.3 x 102.5	130	175.2
	GLP-mw-r250 Microplate holder	4 x 96 plate (MTP/DWP)	4,000	2,737	88 x 128.5 x 80	-	153.0
GRS-G-250-4 Four-wing round 250 ml swing-out rotor	GLB-c250-250 250 ml conical bucket	4 x 250 ml conical	5,000	5,394	60.5 x 130.2	153	193.0
	GLB-250-250 250 ml round bucket	4 x 250 ml	5,000	5,394	62 x 109	153	
	GLB-60-250 60 ml syringe bucket	4 x 60 ml	5,000	5,394	31.5 x 130.2	165	
	GLB-d20/10-250 2 x 20 ml & 2 x 10 ml dual syringe bucket	4 x 2 x 20 ml/10 ml	5,000	4,752 (20 ml) 4,472 (10 ml)	22.5 x 100 (20 ml) 16 x 90 (10 ml)	132 (20 ml) 125 (10 ml)	170 (20 ml) 160 (10 ml)
GRS-G-100-6 Six-wing 100 ml O-ring sealed (b100) swing-out Rotor	GLB-b100-100 a 100 ml O-ring sealed bucket	6 x 100 ml	4,000	3,105	47 x 99	120 (w/cap) 130 (w/o cap)	173.6
	GLB-10-8-100 8 x 10 ml vacutainer bucket	6 x 8 x 10 ml	4,000	3,105	16 x 89	125	173.6
	GLB-b50-100 a 50 ml O-ring sealed bucket	6 x 50 ml	4,000	3,032	30.5 x 97	120 (w/ cap) 125 (w/o cap)	169.5
	GLB-bd15-100 2 x 15 ml O-ring sealed bucket	6 x 2 x 15 ml	4,000	3,032	17 x 96	123 (w/ cap) 127 (w/o cap)	
	GLB-bdc15-100 2 x 15 ml conical O-ring sealed bucket	6 x 2 x 15 ml conical	4,000	3,105	17 x 102.5	120 (w/ cap) 125 (w/o cap)	173.6
Fixed Angle Rotor							
GRA-G-15-24A Fixed angle rotor with 24 of 15 ml sleeves	GLB-15A-FA a 15 ml sleeve for holding 15 ml round or conical tubes	15 ml x 24	4,000	3,134	17.8 x 86.5	125 (120 for conical)	175.2
GRF-G-250-6 Fixed angle 250 ml / 15 ml rotor with aluminum lid <i>Only for 1580R</i>		6 x 250/15 ml	8,000	9,588 (250 ml) 9,395 (15 ml)	62 (250 ml) 17 (15 ml)	130 (250 ml) 120 (15 ml)	134 (250 ml) 131.3 (15 ml)
GRF-G-85-6 a Fixed angle 85 ml rotor with aluminum lid		6 x 85 ml	10,000 (except 1580R) 12,000 (1580R)	12,298 (except 1580R) 17,709 (1580R)	38.5	122	110
GRF-G-50-8 a Fixed angle 50 ml rotor with aluminum lid <i>for 1248R, 1236R, 1580, 1580R</i>		8 x 50 ml	12,000 (1248R/1236R/1580) 15,000 (1580R)	16,582 (1248R/1236R/1580) 25,910 (1580R)	29.5	120	103
GRF-G-15-24 Fixed Angle 15 ml Rotor with aluminum lid <i>Only for "R" Models</i>		24 x 15 ml	8,000	7,370 (inner) 8,872 (outer)	17.5	115	103 (inner) 124 (outer)
GRF-G-m2.0-30 a Fixed angle microtube rotor with aluminum lid		30 x 1.5/2.0 ml	12,000 (1248R/1248/1236R) 15,000 (1580R/1580)	15,520 (1248R/1248/1236R) 24,249 (1580R/1580)	11.1	52	96.4
GRF-G-s0.2-64 Fixed angle PCR strip rotor with aluminum lid		8 x PCR strips	12,000	9,434 (inner) 10,803 (outer)	6.5	16	58.6 (inner) 67.1 (outer)

a : Optional tube adaptors are available.