



CE

INCUSHAKER™ Mini

- + Domed lid accepts flasks up to 1L
- + Touch screen control panel
- + Extremely compact: just 11" wide
- + Exchange flask clamps in one second with MAGic Clamp™ magnetic system

The Incu-Shaker™ Mini is the most compact shaking incubator in its class. While this shaking incubator has a remarkably small footprint, the interior is spacious enough to accept a 9.5 x 11" platform as well as clamps for a variety of flasks, tubes and other common vessels. The standard platform (included) features a non-slip, rubber coated surface, ideal for tissue culture flasks, Petri dishes and staining trays.

The convenient MAGic Clamp™ platform is also available for use with Erlenmeyer flasks and test tube racks. This unique, magnetic attachment method is the easiest way to instantly change between flask clamps of different sizes.



The INSTANT flask attachment system



H1000-MR-1550



H1000-P-SP



Video Demonstration




Ordering Information:

Item No.	Description:
H1001-M*	Incu-Shaker Mini with non-slip rubber mat
H1000-MR	MAGic Clamp universal platform (for flasks/tubes)
H1000-P-MP	4 x microplate platform (standard or deepwell)
H1000-P-SP	Spring rack platform, for uncommon vessels
Accessories for H1000-MR MAGic Clamp Platform	
H1000-MR-CMB	NEW! Adjustable flask clamp for MAGic clamp platform, accepts 125ml (max. 12), 250ml (max. 8) or 500ml (max. 5)
H1000-MR-1000	Flask clamp for MAGic clamp platform, 1000ml (max. 2)
H1000-MR-500	Flask clamp for MAGic clamp platform, 500ml (max. 5)
H1000-MR-250	Flask clamp for MAGic Clamp platform, 250ml (max. 8)
H1000-MR-125	Flask clamp for MAGic Clamp platform, 125ml (max. 12)
H1000-MR-50	Flask clamp for MAGic Clamp platform, 50ml (max. 20)
H1000-MR-MP	MAGic clamp for 1 x microplate (max. 4)
H1000-MR-1550	Tube Rack, 30x15 & 20x50ml (max. 1)
H1000-MR-T15	Tube Rack, 32 x 15ml (max. 2)
H1000-MR-T50	Tube Rack, 15 x 50ml (max. 2)
H1000-MR-TSR	Angled tube rack holder, adjustable tilt (max. 1)

*115V with US plug. For 230V (EU plug), please add (-E).

Technical Data:

Temperature Range:	Ambient +5° to 70°C
Temperature Increments:	0.1°C
Temperature Uniformity:	± 0.25 °C
Temperature Accuracy:	±0.1 °C
Shaking Speed Range:	30 to 300rpm
Speed Increments:	1rpm
Shaking Orbit:	19mm (3/4")
Platform Dimensions:	9.5 x 11.5 in. / 23.5 x 29 cm
Exterior Dimensions (W x D x H):	11 x 16.2 x 13 in. / 28 x 41 x 33 cm
Height with Lid Open:	25 in. / 63 cm
Timer:	1 min. to 48 hours / continuous
Weight:	25 lbs. (11.5kg)
Electrical:	115 or 230V, 50-60Hz, 250W
Warranty:	2 Years

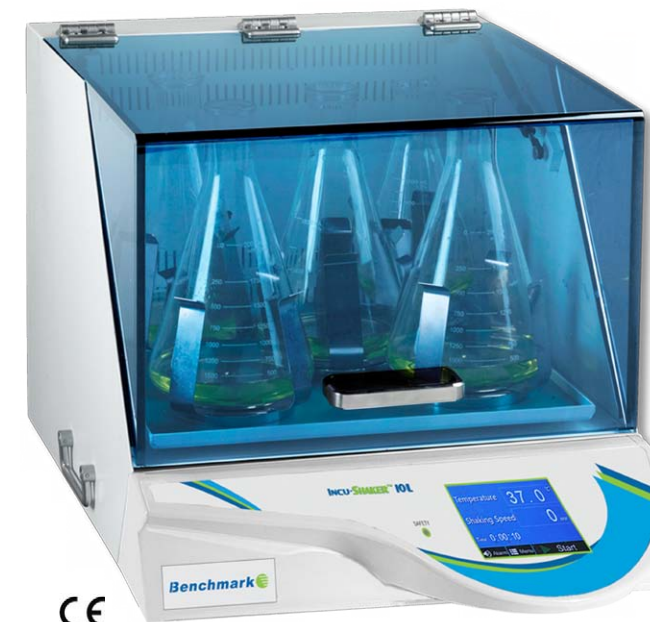

CE

INCUSHAKER™ 10L

- + Two models, heat only & heat/cool
- + Exceptional temperature uniformity
- + High capacity, up to 5 x 2L
- + Exchange flask clamps in one second with MAGic Clamp™ magnetic system
- + Optional shelf for Petri dishes, microplates, etc.



Video Demonstration



The INSTANT flask attachment system

Incu-Shaker™ 10L is a heavy-duty performer, designed for high capacity loads and continuous use. Its outstanding temperature accuracy and uniformity are supported by proprietary heat distribution technology that ensures precisely maintained temperatures throughout the chamber. Inconsistencies due to stratification are reduced to negligible levels and the selected temperature is precisely maintained within 0.25%, even in the corners. In the Incu-Shaker 10LR model, a powerful compressor provides cooling as low as 15 degrees below ambient.

The powerful brushless induction drive is designed for years of trouble-free service, even under continuous use conditions with heavy loads. Noise and vibration are minimized by an advanced motor isolation system. Like other Incu-Shaker models, the 10L is built to last. A standard, rubber mat platform is included and is ideal for use with tissue culture flasks, Petri dishes, staining trays and other flat vessels. The convenient MAGic Clamp™ platform is also available for use with Erlenmeyer flasks and test tube racks. The unique, magnetic attachment method is the easiest way to instantly change between flask clamps of different sizes.

Technical Data:

Temperature Range:	
H2010:	Ambient +5° to 60°C
H2012:	Ambient -15° to 60°C
Temperature Increments:	0.1°C
Temperature Uniformity:	± 0.1.25%
Temperature Accuracy:	±0.1°C
Shaking Speed Range:	30 to 300rpm
Speed Increments:	1rpm
Shaking Orbit:	19mm (3/4")
Platform Dimensions:	17.8 x 17.8 in. / 45 x 45 cm
Chamber Height/Clearance:	12 in. / 30.5m
Exterior Dimensions:	
H2010 (W x D x H):	20 x 26 x 19 in. / 51 x 65 x 47 cm
H2012 (W x D x H):	20 x 31 x 22 in. / 51 x 79 x 56 cm
Height (lid open):	38 in. / 96.5 cm
Timer:	1 min. to 48 hours or continuous
Weight (H2010):	120 lbs (55kg)
Weight (H1012):	170 lbs (78kg)
Electrical (H2010):	120 or 230V, 50-60Hz, 450W
Electrical (H1012):	120 or 230V, 50-60Hz, 950W
Warranty:	2 Years

Ordering Information:

Item No.	Description:
H2010*	Incu-Shaker 10L with non-slip rubber mat
H2012*	Incu-Shaker 10LR (refrigerated) w/ non-slip rubber mat
H1010-MR	MAGic Clamp Universal platform (for flasks/tubes)
H1010-P-SP	Spring rack platform, for uncommon vessels
H1010-SH	Shelf, 14 x 5.5" for Petri dishes, microplates, etc.
Accessories for H1010-MR MAGic Clamp Platform	
H1000-MR-CMB	NEW! Adjustable flask clamp for MAGic clamp platform, accepts 125ml (max. 36), 250ml (max. 25) or 500ml (max. 16)
H1000-MR-3000	Flask clamp for MAGic clamp platform, 3L (max. 4)
H1000-MR-2000	Flask clamp for MAGic clamp platform, 2L (max. 5)
H1000-MR-1000	Flask clamp for MAGic clamp platform, 1L (max. 9)
H1000-MR-500	Flask clamp for MAGic clamp platform, 500ml (max. 16)
H1000-MR-250	Flask clamp for MAGic Clamp platform, 250ml (max. 25)
H1000-MR-125	Flask clamp for MAGic Clamp platform, 125ml (max. 36)
H1000-MR-50	Flask clamp for MAGic clamp platform, 50ml (max. 49)
H1000-MR-MP	Clamp, 1 x microplate, for MAGic Clamp platform (max.. 8)
H1000-MR-1550	Tube Rack, 30x15 & 20x50ml (max. 4)
H1000-MR-T15	Tube Rack, 32 x 15ml (max. 8)
H1000-MR-T50	Tube Rack, 15 x 50ml (max. 8)
H1000-MR-T600	Tube/Bottle Rack, 4 x 500/600ml conical bottle (max. 4)
H1000-MR-TSR	Angled tube rack holder, adjustable tilt (max. 1)

*115V with US plug. For 230V (EU plug), please add (-E).