


Immersing Set

Specification Sheet (Part/REF # 237158)

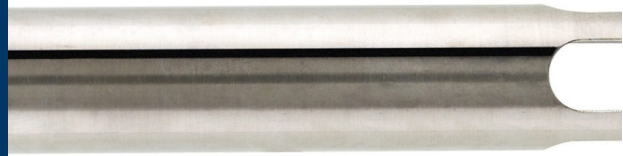

FlexiFit static housings are perfect for batch applications where the sensor can be easily removed when the process has completed.

Product Specifications

For Sensors with	120 mm, 12 mm, PG13,5
Diameter	27 mm
Process Connection	undefined
Sensor Compatibility	pH / ORP, DO, COND
Wetted Parts	Stainless Steel 1.4571 NBR (Nitril Elastomer)
Surface Quality of Steel	Ra < 0.8 µm (N6)
Sensor Insertion Depth	Variable
Armature Insertion Depth	Variable
Min. Total Length	138 mm
Serial Number	No
Certificate	Yes, 3.1 certificate with heat number
ATEX Approval	No
Autoclavable	Yes
CIP	Yes
Steam Sterilizable	Yes
Operating Temperature Range	-30 to 120 °C
Max. Pressure bar g	50 bar

Specifications are subject to change without notice

<https://www.hamiltoncompany.com/process-analytics/sensors/237158>

Spec. Version B