


OxyFerm XL 150

Specification Sheet (Part/REF # 237170)

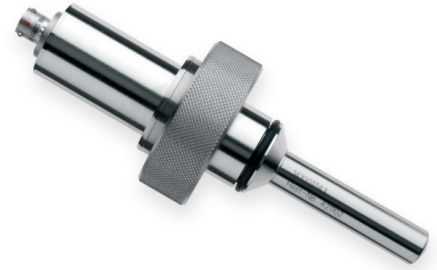

OxyFerm sensors provide a traditional nanoamp (nA) current output with multiple options for electrical connectors and mounting connections.

Product Specifications

Sensor Family	OxyFerm FDA
Parameter	DO (Electrochemical)
Sensor Output	Traditional: nA
a-length	125 mm
Electrical Connector	T82/D4
Measurement Principle	Electrochemical reduction of oxygen
O-ring Position	7 to 63 mm
Measuring Range	10 ppb to 40 ppm (DO) or 0.2 to 1000 mbar (pO ₂)
Drift at Room Temperature	< 1 % per week
Membrane Cap	Optiflow
Electrolyte	Oxylyte
Oxygen Consumption	Ca. 20 ng/h in air at 25 °C
Temperature Sensor	NTC 22 kOhm
Current in Air at 25 °C	40 - 80 nA
Diameter	25 mm
Process Connection	G 1¼ inch (Ingold)
Wetted Parts	Stainless Steel 1.4435 EPDM (Ethylene propylene elastomer) FKM (Fluorocarbon Elastomer) VMQ (Silicone elastomer) Silicone See compliance details in Material Specification document
Surface Quality of Steel	Ra < 0.4 µm (N5)
Electrode system	Silver platinum combination
Polarization Voltage and Time	-670 ± 50 mV, ≥ 2 hours
Serial Number	Yes
Response Time	t98% < 60 s at 25 °C
Certificate	Material and Performance Test Certificate
ATEX Approval	II 1/2 G Ex ia IIC T4/T5/T6 Ga/Gb; II 1/2 D ia IIIC T x °C Da/Db
IECEX Approval	II 1/2 G Ex ia IIC T4/T5/T6 Ga/Gb; II 1/2 D ia IIIC T x °C Da/Db
Autoclavable	Yes
CIP	Yes

Steam Sterilizable	Yes
Operating Temperature Range	0 to 130 °C
Pressure Range bar g	0 to 4 bar
Max. CO₂ Partial Pressure	0.01 bar
Required Flow	≥ 0.03 m/s

Specifications are subject to change without notice

Spec. Version C

<https://www.hamiltoncompany.com/process-analytics/sensors/237170>